

A New Approach for Calculating Position Domain Integrity Risk for Cycle Resolution in Carrier Phase Navigation Systems

Samer Khanafseh and Boris Pervan,
Illinois Institute of Technology, Chicago, IL

Abstract - This paper describes a new theoretical approach to quantify position-domain integrity risk for cycle ambiguity resolution problems in satellite-based navigation systems. It is typically conservatively assumed that all incorrectly fixed cycle ambiguities cause hazardously large position errors. While simple and practical, this conservative assumption can unnecessarily limit navigation availability for applications with stringent requirements for accuracy and integrity. In response, a new method for calculating the integrity risk for carrier phase navigation algorithms is developed. In this method we evaluate the impact of incorrect fixes in the position domain and define tight upper bounds on the resulting navigation integrity risk. Furthermore, a mechanism to implement this method with partially-fixed cycle ambiguity vectors is also derived. The improvement in navigation availability using the new method is quantified through covariance analysis performed over a range of error model parameters.

I. INTRODUCTION

Accuracy and integrity risk are fundamental performance measures that affect navigation system availability. In Global Navigation Satellite Systems (GNSS), integrity risk is quantified as the probability that the position error exceeds predefined alert limits. For life-critical GNSS applications, such as civil aircraft landing with a Ground Based Augmentation System (GBAS), extremely high levels of integrity are required: integrity risk on the order of 10^{-9} per aircraft approach with a vertical position alert limit of 10 m. However, the accuracy requirements for the GBAS application (vertical 95% accuracy on the order of 2 m) are not stringent enough to require use of high precision carrier phase navigation. [1] This situation is in direct contrast with high accuracy geodetic survey applications, which require carrier phase measurements to achieve centimeter level nominal positioning performance, but otherwise have minimal integrity requirements. However, with the emergence of new aviation applications such as autonomous airborne refueling [2], [3] and autonomous shipboard landing [4], [5], where the life of pilots is involved and the vehicles are highly dynamic, high levels of both integrity and accuracy are required simultaneously. In these situations, the use of carrier phase measurements becomes necessary.

To achieve centimeter level positioning accuracy using carrier phase measurements, cycle ambiguities must be resolved. Over the last two decades, a multitude of research has been conducted in the area of cycle resolution and many different approaches have been developed to fix ambiguities. A summary of the most frequently used methods is provided in [6]. Using some of these methods, it is also possible to provide an *a priori* measure of the probability of correct cycle estimation. This probability, which is referred to as the probability of correct fix, must comply with the integrity risk requirements. In applications where integrity and accuracy requirements are stringent, the cycle resolution problem is very challenging.

In a method that has been used previously in such applications to account for cycle resolution integrity risk [7], a threshold on the Probability of Incorrect Fix (*PIF*) is defined. The *PIF* threshold must be allocated from, and be smaller than, the allowable overall navigation integrity risk. During a typical navigation operation, only a subset of ambiguities (or linear combinations thereof) can be fixed with a joint incorrect fix probability lower than the threshold *PIF*. The rest must be left as real numbers. This set of partially fixed ambiguities is then used in position estimation and to generate the corresponding position domain protection levels. A protection level is a statistical bound for position error consistent with the allowable overall integrity risk; it is compared to a pre-defined position domain alert limit for the specific navigation operation. However, in this existing approach it is implicitly and conservatively assumed that all incorrect integer ambiguity candidates will cause the position estimate errors to exceed the alert limits. Unfortunately, fixing a sufficient number of ambiguities to meet the tight accuracy requirements with a success rate that meets the integrity risk requirement is not always possible [8]. In response, a new approach is developed here to calculate integrity risk by evaluating the impact of the incorrect integer candidates directly in the position domain. In addition, a mechanism to implement this method with a partially fixed solution in a navigation system is described.

The availability of carrier phase relative navigation can be greatly enhanced by increasing the *PIF* threshold [9].

However, as noted above, this probability is bounded by the integrity risk requirement. In this paper, we first revisit the previously used method (briefly described above) where the *PIF* threshold is conservatively derived from the integrity risk requirement. Next, a theoretical derivation for a tighter upper bound on the integrity risk of ambiguity fix is formulated probabilistically, in which the effect of different sets of ambiguity candidates on the position error is evaluated. To further improve the performance using the new method, we introduce a strategy to obtain partially fixed solutions. In this approach, a subset of ambiguities is fixed only if the resulting position domain integrity risk meets the requirements. The performance of the new method is initially quantified based on a simple geometry test-case. This is followed by an example application of the method to an autonomous shipboard landing navigation problem. Availability analysis over a wide range of error model parameters is then conducted to quantify the performance of the new method for this application.

II. RELATIONSHIP BETWEEN PIF THRESHOLD AND POSITION DOMAIN PROTECTION LEVELS

This section presents the conventional method that has been derived in [7] which provides a formula for the relation between the *PIF* threshold, fault-free integrity requirement (I_{H0req}) and the vertical protection level. To derive such a formula, it is easiest to start with the concept of the fault free Vertical Protection Level (VPL_{H0}). VPL_{H0} is defined as a statistical overbound where the probability of the vertical position estimate error ($|\hat{x}_v - x_v|$) exceeding VPL_{H0} equals I_{H0req} (1).

$$P\{|\hat{x}_v - x_v| > VPL_{H0}\} = I_{H0req} \quad (1)$$

where,

$P\{\blacksquare\}$: the probability of event ‘ \blacksquare ’

\hat{x}_v : vertical component of the estimated relative position vector

x_v : vertical component of the true relative position vector

After fixing the ambiguities, two mutually exclusive and exhaustive events can be defined in relation to (1): a *correct fix* (CF) and an *incorrect fix* (IF) event. An IF includes all events where some or all ambiguities have been fixed incorrectly. A CF, on the other hand, includes only those events where no ambiguities are fixed incorrectly. Note that by the definition of a correct fix, if we choose not to fix any ambiguity, thereby leaving the cycle ambiguities floating, then the Probability of Correct Fix (*PCF*) is equal to 1. At the same time, if we choose to fix some or all ambiguities, we expect *PCF* to be less than 1. Using the law of total probability, equation (1) can be expanded to,

$$P\{|\hat{x}_v - x_v| > VPL_{H0}\} = P\{|\hat{x}_v - x_v| > VPL_{H0} | CF\} PCF + P\{|\hat{x}_v - x_v| > VPL_{H0} | IF\} PIF \quad (2)$$

Given that the cycle ambiguities are fixed incorrectly, the probability that the vertical error exceeds VPL_{H0} (i.e.,

$P\{|\hat{x}_v - x_v| > VPL_{H0} | IF\}$) can conservatively be assumed to be equal to 1. This assumption is considered conservative because in reality there might be incorrect fix events which result in a small vertical error such that $P\{|\hat{x}_v - x_v| > VPL_{H0} | IF\}$ is less than 1.

Since the correct fix and incorrect fix events are mutually exclusive and exhaustive as defined earlier, $PCF = 1 - PIF$. Using the conservative assumption $P\{|\hat{x}_v - x_v| > VPL_{H0} | IF\} = 1$ in (2) and substituting the result in (1),

$$\begin{aligned} I_{H0req} &= P\{|\hat{x}_v - x_v| > VPL_{H0} | CF\} PCF + PIF \\ \Rightarrow P\{|\hat{x}_v - x_v| > VPL_{H0} | CF\} &= \frac{I_{H0req} - PIF}{1 - PIF} \end{aligned} \quad (3)$$

Under the assumption that the GPS measurement noise is zero-mean Gaussian, the vertical position error, after fixing the cycle ambiguities correctly, can be assumed to be a random variable with a Gaussian distribution of zero mean and standard deviation $\sigma_{v|CF}$. Therefore, a probability multiplier ($K_{VPL|CF}$) is calculated using the inverse of the cumulative normal distribution function of $P\{|\hat{x}_v - x_v| > VPL_{H0} | CF\}$. For example, for $I_{H0req} = 10^{-7}$, in [7] a reasonable threshold for *PIF* was found to be 10^{-8} , which results in $K_{VPL|CF} = 5.35$. In this case, VPL_{H0} is calculated by multiplying $\sigma_{v|CF}$ by 5.35. This VPL_{H0} must comply with the maximum tolerable vertical error, which is known as the Vertical Alert Limit (*VAL*).

If a tighter accuracy and integrity requirement exists, as we will examine later in Section V, this method is not sufficient to meet typical navigation availability requirements. One venue to improve the VPL_{H0} calculation is the conservative assumption, made after (2), that all incorrect integer candidates will cause the position errors to exceed the alert limits. In response, in the following section we introduce an innovative approach to calculate the integrity risk by evaluating the impact of the incorrect integer candidates, weighted by their probability of occurrence, in the position domain.

III. POSITION DOMAIN INTEGRITY RISK OF AMBIGUITY FIX

Instead of using the conservative assumption that the vertical error exceeds VPL_{H0} if ambiguities are fixed incorrectly, we consider an integer space that includes all candidate sets of cycle ambiguities that cause the position error to fall inside the alert limit boundaries. This includes all sets, correct or incorrect fixes, as long as they cause the vertical error to be bounded by the alert limits with the allowable level of integrity risk. In other words, if a candidate set is incorrect but satisfies the position domain alert limit constraints, we recognize that it does not violate integrity.

A. Mathematical Derivation

In this new method, instead of starting from the definition of VPL_{H0} that meets the integrity requirements, we directly calculate the integrity risk (I_{H0}) caused by the cycle ambiguity candidates and compare it to the required fault free integrity risk (I_{H0req}). If the calculated integrity risk (I_{H0}) is less than the required integrity risk then the navigation system is considered available under fault-free conditions. Fault free integrity risk is defined as the probability that the vertical error exceeds VAL as shown in (4).

$$I_{H0} = P\{|\hat{x}_v - x_v| > VAL\} \quad (4)$$

Considering the two mutually exclusive and exhaustive events IF and CF and using the law of total probability as shown in (2), equation (4) can be rewritten as,

$$I_{H0} = P\{|\hat{x}_v - x_v| > VAL \mid CF\}PCF + P\{|\hat{x}_v - x_v| > VAL \mid IF\}PIF \quad (5)$$

The second term in the right hand side of (5) can be expanded to include all possible events that correspond to incorrectly fixed cycle ambiguity vector candidates (6).

$$P\{|\hat{x}_v - x_v| > VAL \mid IF\}PIF = \sum_{n=1}^{\infty} P\{|\hat{x}_v - x_v| > VAL \mid IF_n\}PIF_n \quad (6)$$

where,

IF_n : event corresponding to the n^{th} incorrectly fixed cycle ambiguity vector

PIF_n : probability of occurrence of the n^{th} incorrect fix.

Since it is impractical to calculate the series with an infinite number of incorrect cycle ambiguity vector candidates, the series is broken into two subseries: one represents what will later be the candidates of interest ($n = 1 \rightarrow k$) and another which includes all remaining candidates ($n = k + 1 \rightarrow \infty$) as shown in (7).

$$P\{|\hat{x}_v - x_v| > VAL \mid IF\}PIF = \sum_{n=1}^k P\{|\hat{x}_v - x_v| > VAL \mid IF_n\}PIF_n + \sum_{n=k+1}^{\infty} P\{|\hat{x}_v - x_v| > VAL \mid IF_n\}PIF_n \quad (7)$$

In order to avoid calculating the second term in (7), the conservative assumption $P\{|\hat{x}_v - x_v| > VAL \mid IF_n\} = 1$ for $n = k + 1 \rightarrow \infty$ is used. In addition, since the correct fix event and all incorrect fix events (including the tested candidates) are mutually exclusive and exhaustive, the second term in (7) can be written as

$$\sum_{n=k+1}^{\infty} PIF_n = 1 - PCF - \sum_{n=1}^k PIF_n \quad (8)$$

Substituting (8) into (7) and using the result in (5) yields

$$I_{H0} = P\{|\hat{x}_v - x_v| > VAL \mid CF\}PCF + \sum_{n=1}^k P\{|\hat{x}_v - x_v| > VAL \mid IF_n\}PIF_n + 1 - PCF - \sum_{n=1}^k PIF_n \quad (9)$$

Rearranging (9), we obtain

$$I_{H0} = 1 - \left(1 - P\{|\hat{x}_v - x_v| > VAL \mid CF\}\right)PCF - \sum_{n=1}^k \left(1 - P\{|\hat{x}_v - x_v| > VAL \mid IF_n\}\right)PIF_n \quad (10)$$

Equation (10) is a closed-form expression in which the effect of a set of ambiguity candidates on the position domain integrity risk is explicitly defined. It is noteworthy that if the series term in (10) (which represents the incorrect fix candidates to be tested) is neglected, the remaining expression yields

$$I_{H0} = 1 - \left(1 - P\{|\hat{x}_v - x_v| > VAL \mid CF\}\right)PCF = PIF + P\{|\hat{x}_v - x_v| > VAL \mid CF\}PCF \quad (11)$$

which is equivalent to (3) with VAL and I_{H0} replacing VPL_{H0} and I_{H0req} , respectively. Therefore, as long as the sum of the series in (10) is greater than zero (always true), the integrity risk computed using (10) will be lower than that given by (11). Therefore, equation (10) provides a tighter bound on integrity risk than the conventional method expressed in (11). This in turn will result in improved navigation availability as we will see later in Sections III-E and V.

In order to compute the integrity risk using (10), the terms PCF , PIF_n , $P\{|\hat{x}_v - x_v| > VAL \mid CF\}$, and $P\{|\hat{x}_v - x_v| > VAL \mid IF_n\}$ must be evaluated. For compactness of notation, the latter two terms will be referred to as P_{VALCF} and P_{VALIF} , respectively. In the following sections, the procedure to compute PCF , PIF , P_{VALCF} , and P_{VALIF} is described. In addition, an efficient method to construct cycle ambiguity candidates is developed.

B. Evaluating PCF and PIF

Calculating the probability that a certain set of ambiguities is the correct one depends on the fixing method utilized. In this work, the bootstrap method [10] is used for cycle resolution because it provides a closed form *a priori* probability mass function on integer estimation error. The bootstrap rounding method fixes ambiguities sequentially and provides a measure of the PCF at each step of the fixing process. The sequential adjustment is performed according to the cycle ambiguity conditional variances with the ambiguity having the lowest conditional variance being fixed first. The i^{th} conditional variance ($\sigma_{i/i}^2$), defined as the variance of the ambiguity i conditioned on the previous ambiguities in the set $I = \{1, 2, \dots, i-1\}$ being fixed, is the (i, i) element of the diagonal matrix \mathbf{D} resulting from the \mathbf{LDL}^T decomposition of the

floating cycle ambiguity estimate error covariance matrix. At each step in this sequence (the m^{th} step for example), the probability that the bootstrapped integer estimate ($\tilde{\mathbf{a}}$) (which is an $m \times 1$ vector) being any arbitrary integer candidate (\mathbf{z}) given that the correct fixed ambiguity is (\mathbf{a}) is given in [10] as,

$$P(\tilde{\mathbf{a}} = \mathbf{z}) = \prod_{i=1}^m \left[\Phi \left(\frac{1 - 2\mathbf{l}_i^T (\mathbf{a} - \mathbf{z})}{2\sigma_{i/l}} \right) + \Phi \left(\frac{1 + 2\mathbf{l}_i^T (\mathbf{a} - \mathbf{z})}{2\sigma_{i/l}} \right) - 1 \right] \quad (12)$$

where,

\mathbf{l}_i : the i^{th} column vector of the unit lower triangular matrix (\mathbf{L}^{-T}) resulting from \mathbf{LDL}^T decomposition of the ambiguity covariance matrix

m : the number of cycle ambiguities fixed $m \leq n$

$$\Phi(x) = \int_{-\infty}^x \frac{1}{\sqrt{2\pi}} \exp\left(-\frac{1}{2}v^2\right) dv$$

Therefore, if we set \mathbf{z} equal to \mathbf{a} (the correct cycle ambiguity vector), Equation (12) produces

$$P(\tilde{\mathbf{a}} = \mathbf{a}) = \prod_{i=1}^m \left[2\Phi \left(\frac{1}{2\sigma_{i/l}} \right) - 1 \right] \quad (13)$$

which can be used to calculate PCF . For PIF , the value of ($\mathbf{a} - \mathbf{z}$) can be computed for the incorrect fix candidate of interest. For example, if a one cycle error on the first ambiguity is to be used as the first incorrect fix event (IF_1), then the vector $[1 \ 0 \dots 0]^T$ is used for ($\mathbf{a} - \mathbf{z}$).

C. Evaluating P_{VALCF} and P_{VALIF}

Before estimating the probability of the vertical error exceeding VAL , for simplification purposes and without the loss of generality, the conditional events CF and IF_n are replaced by a general event B . Later on, when we derive a methodology for estimating this probability, we will tackle the difference between the CF and IF events and discuss the specific approach for each one.

By expanding the absolute value inside the conditional probability term of (10), the probability of the vertical error exceeding VAL given that event B took place can be written as:

$$P\left\{|\hat{x}_v - x_v| > VAL \mid B\right\} = P\left\{(\hat{x}_v - x_v) < -VAL \mid B\right\} + P\left\{(\hat{x}_v - x_v) > VAL \mid B\right\} \quad (14)$$

The position vector is linearly estimated using the GPS measurements which are assumed to have Gaussian error distributions with zero mean. Therefore, the distribution of the vertical position estimate error would also be Gaussian with a standard deviation defined as $\sigma_{v/B}$. The mean of this distribution will depend on the event B and hence is referred to as μ_B . Knowing the mean (μ_B) and the standard deviation ($\sigma_{v/B}$), the probability of the first and second terms of (14) can be calculated using the normal cumulative distribution function at the limits $-VAL$ and VAL , respectively.

Returning to the CF and IF_n events, the standard deviation of the vertical position error is not affected by an incorrect fix. Therefore, $\sigma_{v/B} = \sigma_{v/CF}$ for both the CF and IF_n events. The calculation of $\sigma_{v/CF}$ is detailed in Appendix A. The only difference between these events is the mean of the Gaussian distribution. Since the position vector is estimated using unbiased estimators (usually least squares or Kalman filter estimation is used), the mean is zero for the CF event ($\mu_{CF} = 0$). In the case of IF_n events, the incorrect integer candidate will induce a bias in the position vector estimate. The bias \mathbf{b}_n induced in the relative position vector caused by the n^{th} ($\mathbf{a} - \mathbf{z}$) _{n} incorrect candidate is derived in Appendix A and can be computed as,

$$\mathbf{b}_n = \mathbf{K}(\mathbf{a} - \mathbf{z})_n \quad (15)$$

where, $\mathbf{K} = \mathbf{P} \begin{bmatrix} \mathbf{0}_{n \times 3} & \mathbf{Z}_{1:n} \end{bmatrix}^T \left(\begin{bmatrix} \mathbf{0}_{n \times 3} & \mathbf{Z}_{1:n} \end{bmatrix} \mathbf{P} \begin{bmatrix} \mathbf{0}_{n \times 3} & \mathbf{Z}_{1:n} \end{bmatrix}^T \right)^{-1}$, \mathbf{P} is the position and float ambiguities state estimate error covariance and $\mathbf{Z}_{1:n} = \begin{bmatrix} \mathbf{I}_{n \times n} & \mathbf{0}_{n \times (m-n)} \end{bmatrix}$ with m being the total number of states.

P_{VALIF} can be then calculated using a normal cumulative distribution function with standard deviation $\sigma = \sigma_{v/CF}$ and a mean ($\mu_{IF_n} = \mathbf{b}_n$) where \mathbf{b}_n is calculated using (15).

If requirements other than VAL , such as LAL , vertical accuracy (Acc_v) or lateral accuracy (Acc_L) exist, Equation (10) can be altered accordingly. Equations (16), (17) and (18) show the corresponding form of (10) for LAL , vertical and lateral accuracy requirements, respectively.

$$I_{H0LAL} = 1 - \left(1 - P\left\{|\hat{x}_L - x_L| > LAL \mid CF\right\} \right) PCF - \sum_{n=1}^k \left(1 - P\left\{|\hat{x}_L - x_L| > LAL \mid IF_n\right\} \right) PIF_n \quad (16)$$

$$P_{accv} = 1 - \left(1 - P\left\{|\hat{x}_v - x_v| > Acc_v \mid CF\right\} \right) PCF - \sum_{n=1}^k \left(1 - P\left\{|\hat{x}_v - x_v| > Acc_v \mid IF_n\right\} \right) PIF_n \quad (17)$$

$$P_{accL} = 1 - \left(1 - P\left\{|\hat{x}_L - x_L| > Acc_L \mid CF\right\} \right) PCF - \sum_{n=1}^k \left(1 - P\left\{|\hat{x}_L - x_L| > Acc_L \mid IF_n\right\} \right) PIF_n \quad (18)$$

where,

I_{H0LAL} : lateral fault free integrity risk

Acc_v : vertical accuracy requirement

P_{accv} : probability that the vertical position error exceeds Acc_v

Acc_L : lateral accuracy requirement

P_{accL} : probability that the lateral position error exceeds Acc_L

Furthermore, Equation (10) can also be used to provide a tight overbound for VPL_{H0} if required by replacing I_{H0} and VAL with I_{H0req} and VPL_{H0} respectively as shown in (19):

$$I_{H0req} = 1 - \left(1 - P\left\{|\hat{x}_v - x_v| > VPL_{H0} \mid CF\right\} \right) PCF - \sum_{n=1}^k \left(1 - P\left\{|\hat{x}_v - x_v| > VPL_{H0} \mid IF_n\right\} \right) PIF_n \quad (19)$$

where VPL_{H0} can be computed iteratively, using a Newton-Raphson method for example.

Special care should be taken if any lateral requirements exist. In nominal GPS applications the vertical accuracy is usually worse than the lateral accuracy because of the geometry of the satellites (satellites are visible above the horizon only) and its correlation with the receiver clock error. However in the case of incorrect fixing, position biases might exist at different magnitudes and in different directions. Under incorrect fix conditions, it is quite possible to find a few cases under which the vertical requirements are met while the lateral ones are not.

In most navigation applications, the lateral requirements are defined perpendicular to the flight path. Since the geometry of the satellites generally produces different errors in the North and East directions, lateral position error depends on the flight path azimuth. To be conservative in calculating availability, the azimuth that produces the worst accuracy shall be used. In the correct fix (CF) case, the worst case lateral error variance is simply the maximum eigenvalue of the (2×2) horizontal position error covariance matrix. However, when biases of different magnitudes and directions are introduced to the North and East directions (as in the case of incorrect fix), this is not necessarily the case. An alternative method that shows how to find the worst heading for lateral requirements and how to calculate the associated mean (μ_{IF}) and standard deviation ($\sigma_{L|IF}$) is detailed in Appendix B.

D. Generating Cycle Ambiguity Candidates

In principle, cycle ambiguity candidates can be constructed by directly considering all possible combinations of cycle errors for all ambiguities. As discussed in Section III-A, theoretically, if the series term $\sum_{n=1}^k (1 - P\{|\hat{x}_v - x_v| > Acc_v \mid IF_n\}) PIF_n$ in (10) is negligibly small, in (10) we expect no reduction in the computed integrity risk using the new method compared to the conservative one in (3). The terms in this series will be close to zero under two scenarios: if P_{VALID} is large (close to 1), or if PIF is small (close to zero). P_{VALID} will be large if the incorrect fix ambiguity candidates introduce large biases (μ_{IF}) in the position domain. On the other hand, from (12) it can be observed that the larger ($\mathbf{a} - \mathbf{z}$) is, which is the case when the incorrectly fixed ambiguity \mathbf{z} is farther from the correct one \mathbf{a} (the one with maximum probability of correct fix), the smaller PIF becomes. Therefore, adding more candidates with larger ($\mathbf{a} - \mathbf{z}$) will not change the series outcome significantly. Therefore, it is not necessary to search the whole integer space ($k \rightarrow \infty$) for incorrect fix candidates. It is adequate to use only the ones surrounding the correct fix (\mathbf{a}) that lead to near convergence of the series in (10). Since the fixing process is performed sequentially, the number of incorrect fix candidates is expected to grow as the number of fixed ambiguities increases. For example, if incorrect fixes of up to 5 cycles in magnitude different from the correct one are to be considered, the number of ambiguity candidates of interest starts from $11^1 - 1 = 10$ (-5 to 5 skipping 0 which represents the correct fix) when fixing the first ambiguity. In a double difference dual

frequency application with eight visible satellites for example, the number of ambiguities to be fixed is 14 and the number of ambiguity candidates grows up to $(11^{14} - 1 \approx 3.8 \times 10^{14})$. In order to reduce the computation burden of building the incorrect fix ambiguity candidates, the following procedure is developed to construct cycle ambiguity candidates more efficiently:

1. Define a candidate matrix (\mathbf{C}) as the matrix whose columns represent all the vectors ($\mathbf{a} - \mathbf{z}$) for all incorrectly fixed ambiguity candidates. Since one integer is fixed first, \mathbf{C} is initialized with a row vector of integer numbers representing ($\mathbf{a} - \mathbf{z}$) candidates for the first ambiguity. Therefore, if d is used as an arbitrary integer bound on ($\mathbf{a} - \mathbf{z}$), then $\mathbf{C}_1 = [-d, -d + 1, \dots, -1, 1, \dots, d - 1, d]$. This corresponds to the first step in the bootstrap sequential fixing (fixing one ambiguity only).
2. For each step in the sequential fixing, other than the initial one, update \mathbf{C}_i to include all new combinations for the newly fixed ambiguity. This can be accomplished, for $2 \leq i \leq n$, by

$$\mathbf{C}_i = \begin{bmatrix} \mathbf{C}_{i-1}^T & -\mathbf{d} \\ \mathbf{C}_{i-1}^T & -\mathbf{d} - \mathbf{1} \\ \vdots & \vdots \\ \mathbf{C}_{i-1}^T & \mathbf{0} \\ \vdots & \vdots \\ \mathbf{C}_{i-1}^T & \mathbf{d} - \mathbf{1} \\ \mathbf{C}_{i-1}^T & \mathbf{d} \\ \mathbf{0} & -\mathbf{d} \\ \mathbf{0} & -\mathbf{d} + \mathbf{1} \\ \vdots & \vdots \\ \mathbf{0} & -\mathbf{1} \\ \mathbf{0} & \mathbf{1} \\ \vdots & \vdots \\ \mathbf{0} & \mathbf{d} - \mathbf{1} \\ \mathbf{0} & \mathbf{d} \end{bmatrix}^T$$

where \mathbf{d} is a column vector with all of its elements equal to d and $\mathbf{1}$ is a column with all its elements equal to 1.

3. Calculate PIF for each ($\mathbf{a} - \mathbf{z}$) _{i} candidate (each column of the \mathbf{C}_i matrix).
4. Only the relevant candidates that are significant in the calculation of the series in (10) are kept in \mathbf{C} . Therefore, if PIF for the k^{th} candidate (k^{th} column of \mathbf{C}_i) is less than a threshold (for example $0.01 \times I_{H0 \text{ req}}$), then the k^{th} column in \mathbf{C}_i is eliminated.
5. The resultant \mathbf{C}_i is the matrix that includes all ambiguity candidates that are relevant in (10) and will be used in the calculation of I_{H0} .
6. Steps 2 – 5 are repeated for all ambiguities ($i \leq n$) necessary to be fixed to meet the requirements.

Although this sequential elimination procedure is general and more efficient than considering all combinations, it still requires a significant amount of memory. However, its

efficiency can be greatly enhanced and its computation time can be considerably reduced if the ambiguities to be fixed are decorrelated, for example using the Least-square AMBIGUITY Decorrelation Adjustment (LAMBDA) method [11] or the Hassibi et al. decorrelation method that was based on the Lenstra, Lenstra and Lovasz (LLL) algorithm [12]. With prior decorrelation of ambiguities performed using LAMBDA in the examples later in this work, only combinations with $d = 1$ need to be considered (as we will see shortly). Note, however, that when an integer transformation matrix \mathbf{Z} is used to decorrelate the ambiguities, $\mathbf{Z}_{1:m}$ in Equation 15 becomes the rows 1 to m of \mathbf{Z} . Also, the \mathbf{LDL}^T decomposition in Section III.B must be performed on the decorrelated ambiguity matrix.

E. Performance Enhancement Using the Position Domain Integrity Risk Method

In order to demonstrate the gain using the position domain integrity risk method (which we refer to as the ‘*new method*’ for short) over the conventional method explained in Section II, a simple example for a single measurement epoch is used. In this example, a single satellite geometry consisting of 8 satellites is used to provide the float cycle ambiguity estimates and the corresponding covariance. First we will illustrate the performance of the conventional method for this geometry. After estimating fourteen L1/L2 dual frequency double difference float ambiguities (7 ambiguities for L1 and 7 for L2), LAMBDA is used to decorrelate the estimated cycle ambiguity covariance matrix and the bootstrap method is used to sequentially fix the ambiguities. At each step in this sequential fixing process, PCF using (13) and the resultant vertical position accuracy (σ_v) are recorded. In Fig. 1, the vertical accuracy and PIF (where $PIF = 1 - PCF$) are illustrated versus the number of fixed ambiguities during the sequential fixing. In each of these plots the corresponding thresholds which are derived from certain assumed requirements are also shown as dashed lines. For example, in the σ_v plot the dashed line represents the VAL requirement, which is calculated by dividing the VAL (for example 1.1 m is used here) by $K_{VPL_{CF}} = 5.35$ as shown in Section II. For the PIF plot, the dashed line corresponds to the 10^{-8} PIF threshold that is derived from the example integrity risk requirement as explained in Section II. From Fig. 1, it is obvious that although at least four cycle ambiguities must be fixed to meet the VAL requirements, fixing even the first cycle ambiguity violates integrity (shown in the PIF plot). Since both the VAL and integrity risk requirements cannot be met simultaneously, this geometry is considered unavailable using the conventional method of Section II.

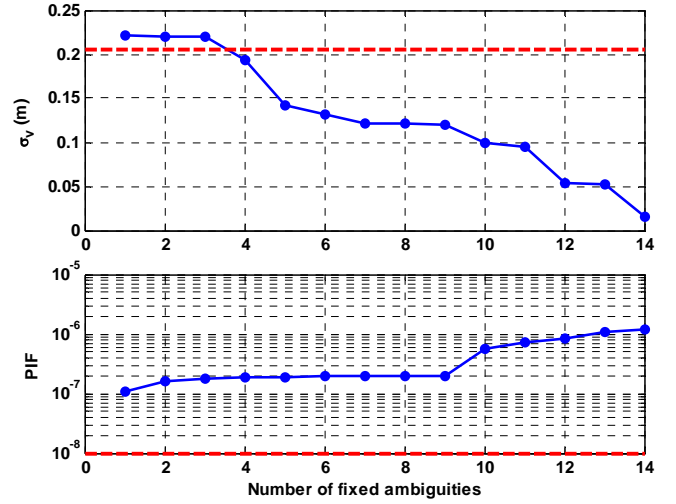


Fig. 1. Vertical Accuracy and PIF Versus the Number of Fixed Ambiguities Using the Conventional Method

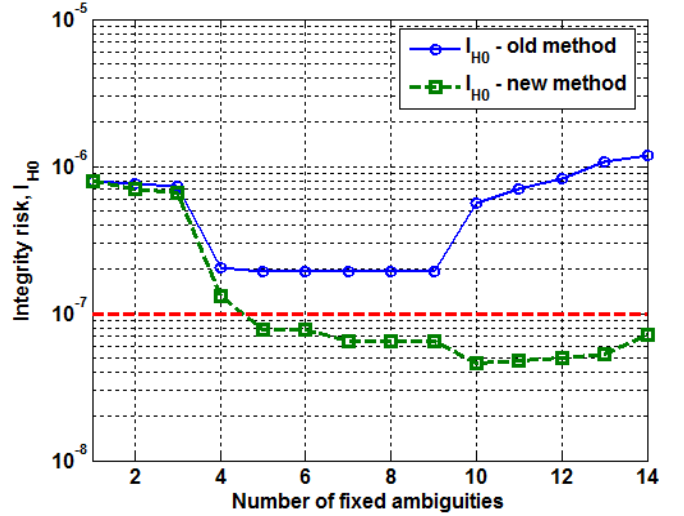


Fig. 2. Integrity as a Function of the Number of Fixed Ambiguities for both the Conventional Method and the New Method

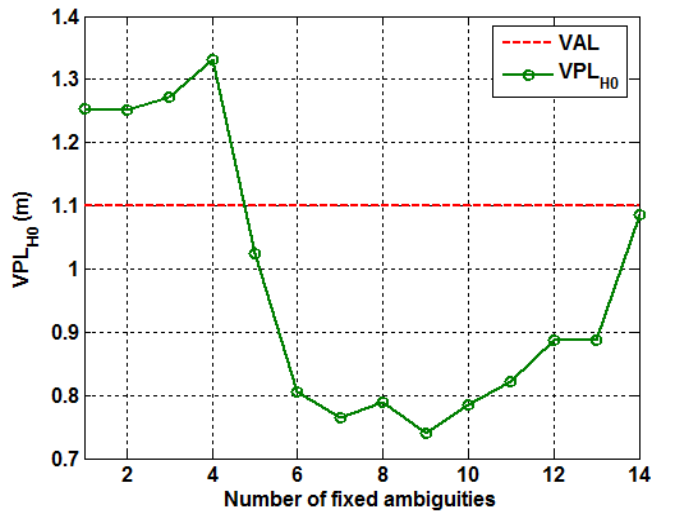


Fig. 3. VPL_{H0} as a Function of the Number of Fixed Ambiguities for both the New Method

The results shown in Fig. 1 can be combined in one plot (solid curve in Fig. 2) that shows integrity I_{H0} calculated using (11) (without the series term) versus the number of fixed ambiguities. If I_{H0} exceeds the integrity risk requirement (for example, $I_{H0req} = 10^{-7}$), the satellite geometry is considered unavailable. Therefore, the solid curve in Fig. 2 confirms that I_{H0} using the conventional method (11) does not meet the integrity risk requirement for this geometry for any number of fixed ambiguities. However, using the new method in (10), the integrity risk requirement is met if more than four ambiguities are fixed. In addition to I_{H0} , VPL_{H0} was computed iteratively by applying Newton-Raphson method on (19). Fig. 3, which represents VPL_{H0} as the number of fixed ambiguity increases, confirms the results and conclusions for the new method seen in Fig.2.

Using LAMBDA decorrelation, 108 combinations of one-cycle-off candidates were adequate to generate the results shown in Fig. 2. On the other hand, if LAMBDA decorrelation is not used, incorrect fixes of up to five cycles are necessary, resulting in 1792 candidates. Comparing these numbers to 3.8×10^{14} candidates corresponding to all combinations of five cycles off illustrates the efficiency of the candidate generation procedure described III-D.

Fig. 2 and Fig. 3 show that for the example geometry the values of I_{H0} and VPL_{H0} are higher when all ambiguities are fixed, rather when fewer are fixed (for example, ten). This is an important observation, because for an arbitrary geometry, it may happen that the geometry would be unavailable in the all-fixed case, but would be available if fewer ambiguities are fixed. Therefore, a partial-fix implementation is needed in the general case [13]. A practical method to choose the number of fixed ambiguities that meets the integrity requirement will be discussed in the next section.

IV. PARTIAL FIXING USING POSITION DOMAIN INTEGRITY RISK METHOD

In this section, a procedure to determine the navigation system availability using the position domain integrity risk method with partial fixing is described. In the previous section, it was concluded that a partially fixed solution is necessary to improve the availability using the proposed algorithm.

Fig. 4 shows a flow chart that describes the final partial fixing algorithm using a hybrid of the conventional and the new method implementation in a navigation architecture. After estimating the float ambiguities, the float estimates (\hat{N} in Fig. 4) are input to the LAMBDA bootstrap fixing algorithm. These ambiguities are fixed sequentially until the PIF exceeds the threshold (1×10^{-8}). The remaining linear combinations are left floating. At this point, if the resultant VPL_{H0} is less than VAL then this geometry is available and therefore it is unnecessary to go to the second loop, which contains the position domain integrity calculation. If VPL_{H0} is greater than VAL the incorrect fix candidates are then constructed for the set of fixed ambiguities up to this point. Using these candidates, I_{H0} using (10) is calculated and compared to the integrity risk requirement I_{H0req} . If I_{H0} is less than I_{H0req} , the geometry is considered available. Otherwise, the next ambiguity is fixed. This process is repeated until an

available solution is found or all ambiguities are fixed and I_{H0} is still larger than I_{H0req} . At this point, the geometry is said to be unavailable. Although this process can be repeated to scan through all ambiguities then search for the minimum integrity and fix the corresponding number of ambiguities, this consideration is computationally inefficient. Specifically, from a practical point of view, as long as all requirements are met for a specific application, there is no real necessity in fixing more ambiguities.

So far, the performance enhancement using the new method has been demonstrated based on a single geometry only. In order to investigate the potential for performance benefit more thoroughly, an availability analysis for an example shipboard aircraft landing application is conducted using both the conventional and new methods.

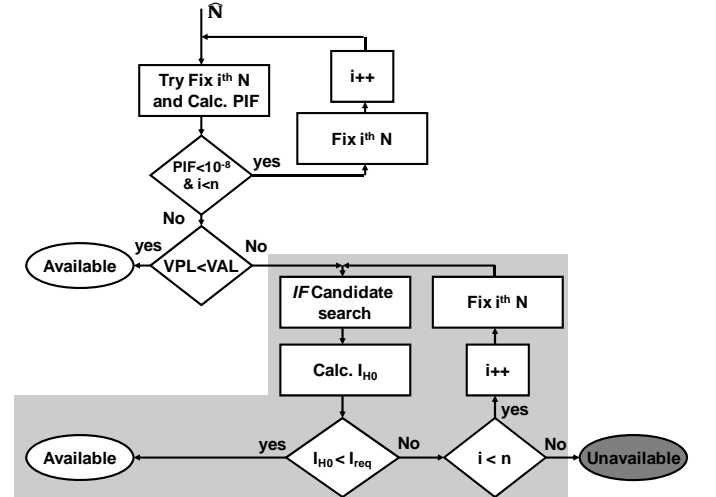


Fig. 4. Schematic Diagram Showing the Structure of the Partial Fixing Algorithm Using the Position Domain Integrity of Ambiguity Fix Method

V. AVAILABILITY PERFORMANCE

A. Navigation Algorithm

This section is a description of the navigation architecture in which the developed fixing method described in Section III will be implemented. This navigation architecture is designed to support a specific application: autonomous shipboard landing. The outputs of the shipboard-landing navigation architecture (float estimates and their covariance matrices) are used as inputs to the fixing algorithm. Because of the mobility of the reference station in a shipboard-relative landing application, higher levels of accuracy are required than for similar precision approach applications at land-based airfields. In addition, to ensure safety and operational usefulness, the navigation architecture must provide high levels of integrity and availability. Because of the highly stringent requirements, the navigation system is based on CPDGPS positioning. However in order to benefit from the high precision of CPDGPS the correct resolution of cycles must be ensured. A number of methods have been used in prior work to aid in the cycle resolution. Satellite motion can provide the observability of the cycle ambiguities [14]. Unfortunately the rate of satellite motion is relatively slow in comparison with the time scales of the most stringent aviation application such as precision approach and landing.

Heo, et al. have proposed a GPS navigation algorithm for autonomous shipboard landing applications where geometry free/divergence free code-carrier filtering is performed continuously for visible satellites on both the aircraft and the ship until the aircraft is close to the ship [5] [8]. Geometry-free filtering [15], by definition, does not depend on the geometry of the satellites or the user location and eliminates all error sources except for receiver noise and multipath. A geometry free measurement of the widelane cycle ambiguity is formed by subtracting the narrowlane pseudorange from the widelane carrier [14], [15]. A drawback of the geometry free measurement is the presence of higher noise relative to the L1 and L2 carrier phase measurements. This can be overcome by filtering the geometry free measurement over time prior to the final approach. In order to model colored multipath noise in the geometry free measurements, a first order Gauss-Markov measurement error model is used. A time constant of one minute for the ship and 30 seconds for aircraft is assumed. The outputs of the filtering process are the floating widelane cycle ambiguity estimates. When the aircraft is close to the ship, L1/L2 cycle ambiguity estimates can be extracted with the aid of the satellite geometric redundancy [5], [4]. Next, the cycle ambiguities are fixed using the bootstrap method [10]. For the conventional method, the bootstrap rounding process is performed for those ambiguities that can be fixed with a *PIF* that is lower than a threshold of 10^{-8} . The remaining ambiguities remain floating. With the ambiguities partially fixed, the standard deviation of the position estimate error (σ_v) is used to calculate VPL_{HO} . To account for the GPS satellite geometry change, availability analysis is performed by simulating 1440 satellite geometries (one geometry per minute during the day). Availability is then calculated as the percentage of time (geometries) for which VPL_{HO} is less than *VAL*. For the new method, the position domain integrity of cycle resolution (I_{HO}) is calculated using (10). If I_{HO} is less than the requirements ($I_{HO req}$) the geometry is considered available.

B. Availability Results

In this section, the performance of the position domain integrity risk method with partial fixing (Fig. 4) is compared to the conventional method (Section II). The requirements and simulation parameters that are used in this work are based on those given in [5] and [8]. An accuracy requirement of 30 cm with $P_{acc} = 95\%$ is used to evaluate the effectiveness of the new method under a tighter accuracy requirement than the ones implicitly provided by the alert limits. In this simulation, the standard deviation of the carrier phase (single difference) measurement noise $\sigma_{\Delta\phi}$ is assumed to be 1 cm. In addition, different values for the standard deviation of the pseudorange (single difference) measurement noise $\sigma_{\Delta PR}$ ranging from 20 cm to 70 cm are used. The single difference standard deviations $\sigma_{\Delta PR}$ and $\sigma_{\Delta\phi}$ are related to the raw values (σ_{PR} and σ_{ϕ}) by a scaling factor of $\sqrt{2}$. In this analysis, a maximum prefiltering period of 30 minutes is used to generate floating estimates of the widelane cycle ambiguities. In other words, if the satellite has been visible for a period of time longer than the maximum prefiltering time, the prefiltering time is set to

the maximum prefiltering time. The rest of the simulation parameters are summarized in Table I.

TABLE I
SIMULATION PARAMETERS

Parameter	Value
$I_{HO req}$	10^{-7}
<i>VAL</i>	1.1 m
<i>LAL</i>	1.1 m
PIF threshold	10^{-8}
Satellite constellation	Standard 24 satellite (DO229C) [16]
Location	Honolulu (22°N and 158°W)
Maximum prefiltering time	30 minutes
Ship multipath time constant	1 minute
Aircraft multipath time constant	30 seconds

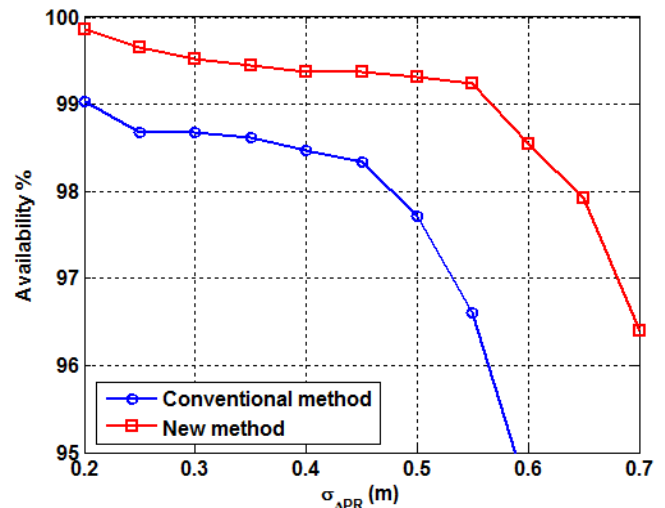


Fig. 5. Availability Results for Different $\sigma_{\Delta PR}$ Values Using both the Conventional Method and New Method

Using the parameters detailed in Table I, a covariance analysis simulation was performed and availability was calculated. Fig. 5 shows the availability results for both methods using different $\sigma_{\Delta PR}$ values ranging from 20 cm to 70 cm. It can be noticed that the new method outperforms the conventional method by a range of approximately 1% at $\sigma_{\Delta PR} = 20$ cm to as much as 40% at $\sigma_{\Delta PR} = 70$ cm. Furthermore, in the case that the availability requirement is 99% (a typical requirement), a navigation algorithm with the conventional method can only be used if $\sigma_{\Delta PR} = 20$ cm. On the other hand, if the new method is used, $\sigma_{\Delta PR}$ of up to 55 cm can be tolerated. The results shown in Fig. 5 are for an accuracy requirement of 30 cm. Fig. 6 shows the efficiency of the new method compared to the conventional one for different accuracy requirements using $\sigma_{\Delta PR} = 50$ cm. Again, the new method outperforms the conventional method and provides up to 78% increase in availability at 15 cm accuracy compared to the conventional one.

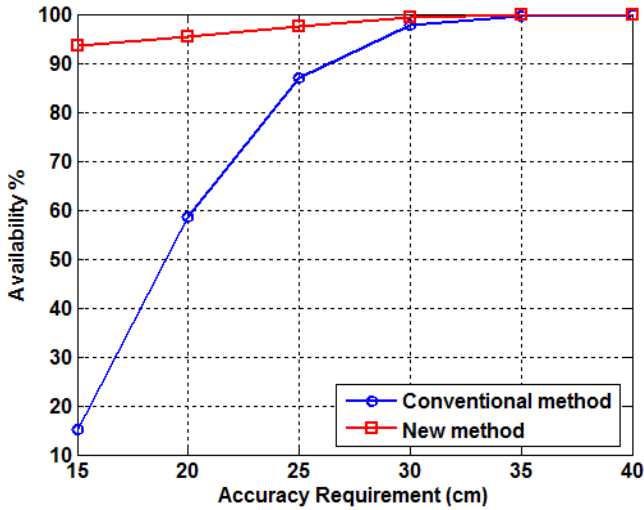


Fig. 6. Availability Results for Different Accuracy Requirements Using both the Conventional Method and New Method at $\sigma_{APR} = 50$ cm

In summary, the position domain integrity risk method can be greatly beneficial in navigation applications with high accuracy, stringent integrity and tight availability requirements. Recall that the numerical calculations in this work have been implemented using the bootstrap method. LAMBDA was only used to decorrelate the estimated ambiguity covariance, which increases the computational efficiency but is otherwise not required. However, the integrity risk formulas derived here are equally applicable to other cycle resolution algorithms as long as they are capable of quantifying the probability of fixing on any given integer candidate set.

VI. CONCLUSIONS

A new method was developed to calculate the fault free integrity risk for cycle resolution in carrier phase navigation algorithms by evaluating the impact of incorrect fixes in the position domain. In addition, a mechanism to implement this method with a partially fixed solution was described. The improvement in navigation availability using this partial fixing method was quantified for an example shipboard landing relative navigation application. The availability analysis demonstrated that the new method provides considerable availability enhancement relative to the existing methods. For the near future, an experimental validation and real time implementation of this method will be considered.

APPENDIX A

This appendix explains how to compute $\sigma_{v|CF}$ and the position domain bias \mathbf{b}_m induced in the relative position vector caused by the incorrect ambiguity candidates.

Assume that prior to the fixing step, the estimate vector $\hat{\mathbf{S}}$ of the float cycle ambiguities and the relative position vector and the associated estimate error covariance are available as,

$$\hat{\mathbf{S}} = \begin{bmatrix} \hat{\mathbf{x}} \\ \hat{\mathbf{N}} \end{bmatrix} \text{ and } \mathbf{P} = \begin{bmatrix} \mathbf{P}_{\hat{\mathbf{x}}} & \mathbf{P}_{\hat{\mathbf{x}}\hat{\mathbf{N}}} \\ \mathbf{P}_{\hat{\mathbf{N}}\hat{\mathbf{x}}} & \mathbf{P}_{\hat{\mathbf{N}}} \end{bmatrix}. \text{ First, the } k^{\text{th}} \text{ ambiguity in the}$$

Z-decorrelated space $\hat{N}_z^{(k)}$ is rounded to its nearest integer $N_z^{(k)}$.

$$N_z^{(k)} = \text{round} \left(\begin{bmatrix} \mathbf{0}_{1 \times 3} & \mathbf{Z}_k \end{bmatrix} \mathbf{S}^{(k-1)} \right) \quad (20)$$

where,

$N_z^{(k)}$: k^{th} rounded ambiguity element

\mathbf{Z}_k : k^{th} row of the transformation matrix \mathbf{Z} . notice, however, that if LAMBDA is not used, $\mathbf{Z}_{1:k} = \begin{bmatrix} \mathbf{0}_{1 \times (k-1)} & 1 & \mathbf{0}_{1 \times (n-k)} \end{bmatrix}$

$\mathbf{S}^{(k-1)}$: updated state vector \mathbf{S} based on fixing ambiguities

1 to $k-1$, such that $(\mathbf{S}^{(0)} = \hat{\mathbf{S}} = \begin{bmatrix} \hat{\mathbf{x}} & \hat{\mathbf{N}} \end{bmatrix}^T)$

Next, the position vector estimate and remaining real valued ambiguities \mathbf{S} are updated accordingly as follows:

$$\mathbf{K} = \mathbf{P}^{(k-1)} \begin{bmatrix} \mathbf{0}_{1 \times 3} & \mathbf{Z}_k \end{bmatrix}^T \left(\begin{bmatrix} \mathbf{0}_{1 \times 3} & \mathbf{Z}_k \end{bmatrix} \mathbf{P}^{(k-1)} \begin{bmatrix} \mathbf{0}_{1 \times 3} & \mathbf{Z}_k \end{bmatrix}^T \right)^{-1} \quad (21)$$

$$\mathbf{S}^{(k)} = \mathbf{S}^{(k-1)} + \mathbf{K} \left(N_z^{(k)} - \begin{bmatrix} \mathbf{0}_{1 \times 3} & \mathbf{Z}_k \end{bmatrix} \mathbf{S}^{(k-1)} \right) \quad (22)$$

$$\mathbf{P}^{(k)} = (\mathbf{I} - \mathbf{K} \begin{bmatrix} \mathbf{0}_{1 \times 3} & \mathbf{Z}_k \end{bmatrix}) \mathbf{P}^{(k-1)} \quad (23)$$

where $\mathbf{P}^{(k)}$ is the covariance of the updated state vector after fixing the k^{th} cycle ambiguity, such that $(\mathbf{P}^{(0)} = \mathbf{P})$. This process is repeated for the desired number of fixed ambiguities (for example m times). At this point, $\sigma_{v|CF}$ can be computed as the square root of the (3, 3) element of $\mathbf{P}^{(m)}$.

$$\sigma_{v|CF} = \sqrt{\mathbf{P}_{(3,3)}^{(m)}} \quad (24)$$

For calculating the position domain bias \mathbf{b}_m , we start by knowing that the states after fixing m ambiguities (replacing Equations 21 and 22) by their equivalents:

$$\mathbf{K} = \mathbf{P} \begin{bmatrix} \mathbf{0}_{m \times 3} & \mathbf{Z}_{1:m} \end{bmatrix}^T \left(\begin{bmatrix} \mathbf{0}_{m \times 3} & \mathbf{Z}_{1:m} \end{bmatrix} \mathbf{P} \begin{bmatrix} \mathbf{0}_{m \times 3} & \mathbf{Z}_{1:m} \end{bmatrix}^T \right)^{-1} \quad (25)$$

$$\mathbf{S}^{(m)} = \hat{\mathbf{S}} + \mathbf{K} \left(\mathbf{N}_z^{(1:m)} - \begin{bmatrix} \mathbf{0}_{m \times 3} & \mathbf{Z}_{1:m} \end{bmatrix} \hat{\mathbf{S}} \right) \quad (26)$$

where $\mathbf{Z}_{1:m}$ is the rows 1 to m of the transformation matrix \mathbf{Z} .

If LAMBDA is not used, $\mathbf{Z}_{1:m}$ is replaced by

$$\mathbf{Z}_{1:m} = \begin{bmatrix} \mathbf{I}_{m \times m} & \mathbf{0}_{m \times (n-m)} \end{bmatrix}.$$

Now, if we assume that the correct ambiguities vector is \mathbf{a}_m and the incorrect ambiguities vector is \mathbf{z}_m , the estimated states become after fixing the ambiguities to the correct ones (\mathbf{S}_{CF}) and the states after fixing the ambiguities to the incorrect ones (\mathbf{S}_{IF}), respectively are:

$$\mathbf{S}_{CF}^{(m)} = \hat{\mathbf{S}} + \mathbf{K} \left(\mathbf{a}_m - \begin{bmatrix} \mathbf{0}_{m \times 3} & \mathbf{Z}_{1:m} \end{bmatrix} \hat{\mathbf{S}} \right) \quad (27)$$

$$\mathbf{S}_{IF}^{(m)} = \hat{\mathbf{S}} + \mathbf{K} \left(\mathbf{z}_m - \begin{bmatrix} \mathbf{0}_{m \times 3} & \mathbf{Z}_{1:m} \end{bmatrix} \hat{\mathbf{S}} \right) \quad (28)$$

Therefore, the position domain bias \mathbf{b}_m induced in the relative position vector caused by the m^{th} ($\mathbf{a} - \mathbf{z}$) $_m$ incorrect candidate is:

$$\mathbf{b}_m = \mathbf{S}_{CF}^{(m)} - \mathbf{S}_{IF}^{(m)} = \mathbf{K} (\mathbf{a} - \mathbf{z})_m \quad (29)$$

APPENDIX B

In calculating integrity and availability, worst case scenarios are usually pursued. Using the vertical error component σ_v of the estimated position vector, P_{VAL} can be directly calculated. In contrast, the lateral direction for the LAL is defined as the direction perpendicular to the direction of motion of the vehicle. The relative position vector estimation provides a covariance matrix (\mathbf{P}) for the north and east directions, which can be represented as a covariance ellipse. If this covariance ellipse is centered at the origin (zero mean error), the direction of the major axis of this ellipse represents the direction (heading) corresponding to the maximum sigma lateral (σ_L). Therefore, in the case of a correct fix, the worst P_{LALCF} is based on σ_L which is the square root of the maximum eigenvalue of the 2×2 covariance matrix of the position vector estimate error. However, in the incorrect fix case, biases in the north and east directions (μ_n and μ_e) are introduced. Therefore, the covariance ellipse is centered at (μ_e , μ_n) instead of the origin (Fig. 7). As a result, the direction of the major axis will not necessarily correspond to the worst P_{LALIF} . In this work, all heading angles (θ) from 1 to 360 degrees (in one degree increments) are considered and $P_{LAL}(\theta)$ is computed for all θ . The maximum value of $P_{LAL}(\theta)$ is chosen as P_{LALIF} .

In order to calculate the mean (μ) and standard deviation (σ_L) that are used in calculating P_{LALIF} , a coordinate rotation by angle θ is performed on the covariance ellipse. This can be performed by first computing the position mean magnitude (μ_p) and the direction of the mean (α) as follows:

$$\begin{aligned} \mu_p &= \sqrt{\mu_n^2 + \mu_e^2} \\ \alpha &= \tan^{-1}\left(\frac{\mu_n}{\mu_e}\right) \end{aligned} \quad (30)$$

Therefore, the projection of the mean on the new direction, which is the mean that is used in calculating LAL, is:

$$\mu = \mu_p \cos(\theta - \alpha) \quad (31)$$

If \mathbf{P} is the 2×2 covariance of the estimated position corresponding to the north and east directions, the projection of the covariance to calculate sigma (σ_L) can be calculated using:

$$\sigma_L^2 = \sup_{\theta} \left(\begin{bmatrix} \cos(\theta) & \sin(\theta) \end{bmatrix} \mathbf{P} \begin{bmatrix} \cos(\theta) \\ \sin(\theta) \end{bmatrix} \right) \quad (32)$$

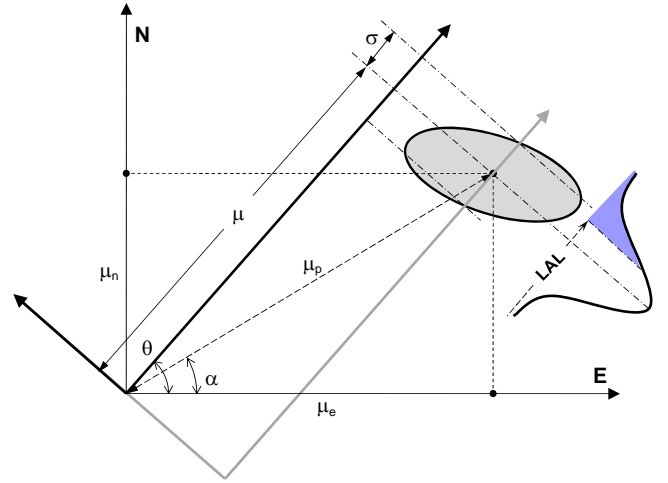


Fig. 7. Calculating the Mean and Standard Deviation of the Projection of the Covariance Ellipse for Heading Angle θ

ACKNOWLEDGMENT

The authors gratefully acknowledge the Naval Air Warfare Center Aircraft Division (NAWCAD) of the US Navy for supporting this research. The authors would like to specifically acknowledge the support and guidance of Glenn Colby and Marie Lage regarding this work. The authors also acknowledge Shuwu Wu of Raytheon Company for the discussion regarding this work. This paper is based on a paper presented in the IEEE/ION Position, Location and Navigation Symposium (PLANS 2008), Monterey, CA, May 2008.

REFERENCES

- [1] "Minimum Aviation System Performance Standards for the Local Area Augmentation System Airborne Equipment," RTCA Document Number DO-245A, December 2004.
- [2] J. Hansen, G. Romrell, N. Nabaa, R. Andersen, L. Myers, and J. McCormick, "DARPA Autonomous Airborne Refueling Demonstration Program with Initial Results," *Proceedings of the 19th International Technical Meeting of the Satellite Division of the Institute of Navigation ION GNSS 2006*, Fort Worth, TX, Sep. 2006.
- [3] S. Khanafseh, B. Pervan, and G. Colby, "Carrier Phase DGPS for Autonomous Airborne Refueling," *Proceedings of the 2005 National Technical Meeting of the Institute of Navigation*, San Diego, CA, Jan. 2005.
- [4] S. Dogra, J. Wright, and J. Hansen, "Sea-Based JPALS Relative Navigation Algorithm Development," *Proceedings of the 18th International Technical Meeting of the Satellite Division of the Institute of Navigation ION GNSS 2005*, Long Beach, CA, Sept. 2005.
- [5] M. Heo, B. Pervan, S. Pullen, J. Gautier, P. Enge, and D. Gebre-Eziabher, "Robust Airborne Navigation Algorithm for SRGPS," *Proceedings of IEEE/ION Position, Location, and Navigation Symposium (PLANS '2004)*, Monterey, CA, Apr. 2004.
- [6] D. Kim and R. Langley, "GPS Ambiguity Resolution and Validation: Methodologies, Trends and Issues,"

- Proceedings of the 7th GNSS Workshop - International Symposium on GPS/GNSS*, Seoul, Korea, Nov. 2000.
- [7] B. Pervan and F. C. Chan, "System Concepts for Cycle Ambiguity Resolution and Verification for Aircraft Carrier Landings," *Proceedings of the 14th International Technical Meeting of the Satellite Division of the Institute of Navigation ION GPS 2001*, Salt Lake City, UT, Sept. 2001.
- [8] M. B. Heo, "Robust Carrier Phase DGPS Navigation for Shipboard Landing of Aircraft," *PhD Dissertation, Illinois Institute of Technology*, Chicago, IL, Dec. 2004.
- [9] S. Khanafseh, B. Kempny, and B. Pervan, "New Applications of Measurement Redundancy in High Performance Relative Navigation Systems for Aviation," *Proceedings of the 19th International Technical Meeting of the Satellite Division of the Institute of Navigation ION GNSS 2006*, Fort Worth, TX, Sept. 2006.
- [10] P. Teunissen, "GNSS Ambiguity Bootstrapping: Theory and Application," *Proceedings of KIS2001, International Symposium on Kinematic Systems in Geodesy, Geomatics and Navigation*, Banff, Canada.
- [11] P. Teunissen, D. Odijk, and P. Joosten, "A Probabilistic Evaluation of Correct GPS Ambiguity Resolution," *Proceedings of the 11th International Technical Meeting of the Satellite Division of the Institute of Navigation*, Nashville, TN, Sept. 1998.
- [12] A. Hassibi and S. Boyd, "Integer Parameter Estimation in Linear Models with Application to GPS," *IEEE Transactions on Signal Processing*, Vol. 46, No. 11, Nov. 1998.
- [13] P. Teunissen, P. Joosten, C. Tiberius, "Geometry-free Ambiguity Success Rates in Case of Partial Fixing," *Proceedings of the 1999 National Technical Meeting of the Institute of Navigation*, San Diego, CA, Jan. 1999.
- [14] P. Misra and P. Enge, *Global Positioning System signals, Measurements, and Performance*. Lincoln, MA: Ganga-Jumuna Press, 2001.
- [15] G. A. McGraw and R. S. Y. Young, "Dual Frequency Smoothing DGPS Performance Evaluation Studies," *Proceedings of the 2005 National Technical Meeting of the Institute of Navigation*, San Diego, CA, Jan. 2005.
- [16] "Minimum Operational Performance Standards for Global Positioning System/Wide Area Augmentation System Airborne Equipment," RTCA Document Number DO-229C, Nov. 2001, Appendix B.5.